


EP-825

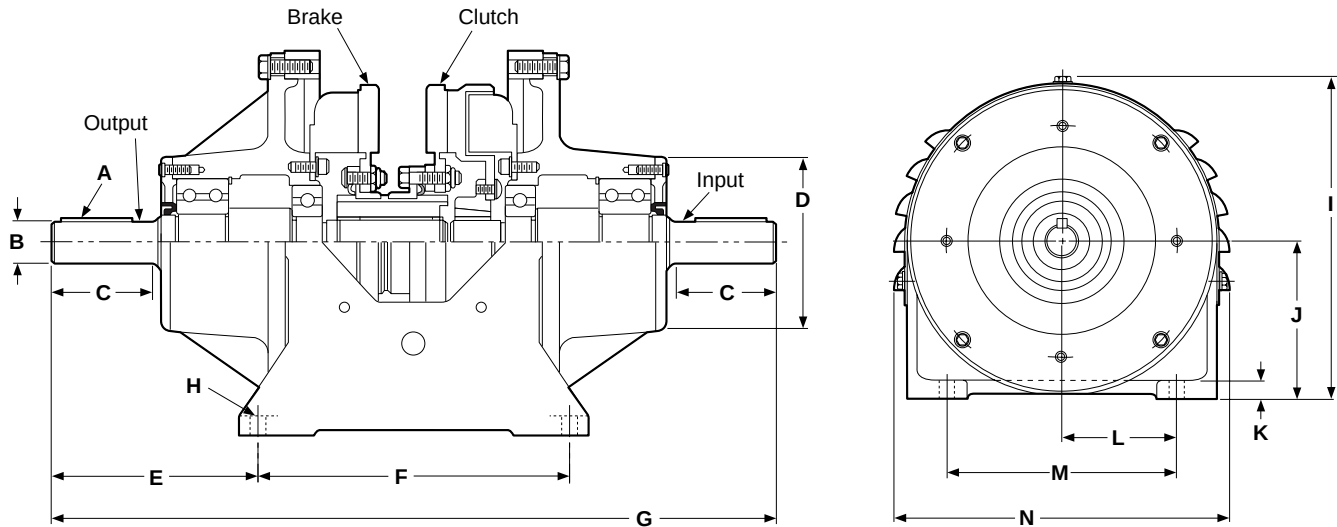

All dimensions are nominal, unless otherwise noted.

Size	A	B Dia.	C Min.	D Max. Dia.	E	F	G Max.	H	I	J	K	L	M	N Max.
825	1/4 x 1/4 x 2	<u>1.1250</u> 1.1245	2.875	5.000	5.734	8.500	20.031	.406 Dia. (4 holes)	10.812	<u>5.254</u> 5.252	.562	4.250	8.500	11.609

Specifications EP-825

Model Size	Voltage DC	Unit	Static Torque	Inertia*–WR ² lb.ft. ²	Max. RPM	Weight lbs.
EP-825	6, 24 & 90	Clutch	125	.651	3600	123
		Brake	125	.242		

Specifications EP-1000

Model Size	Voltage DC	Static Torque	Inertia*–WR ² (lb-ft ²)		Max. RPM	Weight lbs.
			Output Side	Input Side		
EP-1000	6	240 lb.ft.	1.45	1.01	3000	288
	24	240 lb.ft.	1.45	1.01	3000	288
	90	240 lb.ft.	1.45	1.01	3000	288

All dimensions are nominal, unless otherwise noted.

Size	A	B Dia.	C Min.	D Dia.	E	F	G Max.	H	I	J	K	L	M	N Max.
1000	1/2 x 1/2 x 3-3/4	<u>1.875</u> 1.874	4.750	5.687	8.250	12.250	28.750	.656 Dia. (4 holes)	12.500	<u>6.255</u> 6.241	.718	5.000	10.000	12.875

EP-1000

